


SPECIFICATION	VALUE
NO. of PHASES	3
NO. of POLES	4
RATED VOLTAGE(V)	24
RATED CURRENT(A)	9±10%
RATED POWER(W)	134
RATED SPEED(RPM)	3500±10%
RATED TORQUE(mNm)	370
HALL LEAD STYLE	UL 1007 AWG26
PHASE LEAD STYLE	UL 1007 AWG18
SENSOR	HALL SENSOR
INSULATION CLASS	CLASS B
INSULATION RESISTANCE	100MΩ MIN @ 500VDC
DIELECTRIC STRENGTH TEST	500VAC for 1 MINUTE
BEARING TYPE	NMB BALL BEARING, C3

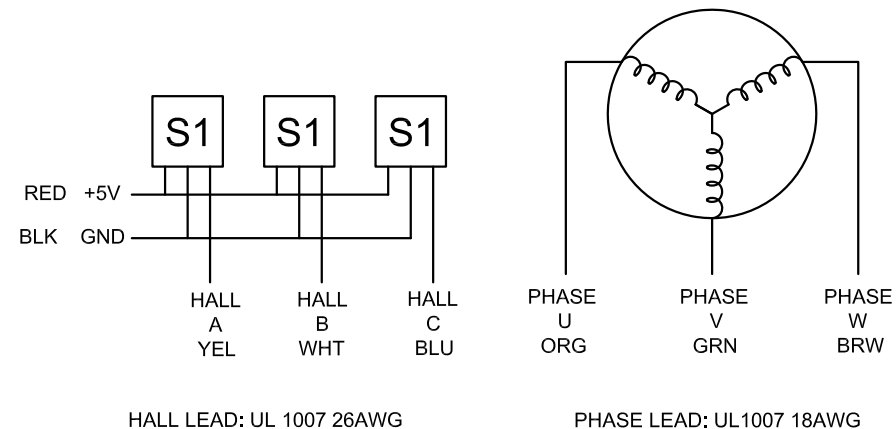

1.5:1

SCALE

APVD

CHKD

DRN

SIGNATURE

DATE

BRUSHLESS DC MOTOR

57BLR70-24-01